

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number  
**WO 2004/002832 A1**

- (51) International Patent Classification<sup>7</sup>: **B65B 55/02**, 25/00
- (21) International Application Number: PCT/EP2003/006903
- (22) International Filing Date: 27 June 2003 (27.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
02077594.6 28 June 2002 (28.06.2002) EP
- (71) Applicant (for all designated States except US): **CORUS STAAL BV** [NL/NL]; P.O. Box 10000, NL-1970 CA IJmuiden (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **TAMIS, Paulus, Jozef** [NL/NL]; Grote Boterbloem 85, NL-1991 LK Velsbroek (NL).
- (74) Agent: **HERMAN DE GROOT, Johan, Willem**; Corus Technology BV, P.O. Box 10000, NL-1970 CA IJmuiden (NL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR PROVIDING A HEAT TREATED FILLED AND CLOSED METAL CAN



(57) Abstract: Method for providing a heat treated filled and closed can, comprising the consecutive steps of: - filling a metal cup, - closing the metal cup with a lid making a gas tight heat treatable can, - heat treating the can, wherein measures are taken to achieve an under-pressure in the can after closing the cup characterised in that a can is chosen that is either of a flexible type on the one hand or of a rigid type with increased strength provided with a seal on lid on the other hand. The measures comprise a step belonging to the group of steps consisting of: - using a partly frozen filling; - having the filling comprise constituents that interact after closing so as to lower the specific volume of the filling in the can; - adding steam to the cup after filling and before closing; - closing the cup under sub-atmospheric pressure; - partly evacuating the can after closing.

**BEST AVAILABLE COPY**

## METHOD FOR PROVIDING A HEAT TREATED FILLED AND CLOSED METAL CAN

The invention relates to a method for providing a heat treated filled and closed metal can.

A heat treated filled and closed metal can will usually contain a food for humans or animals, which food is or is to be heat-treated in the closed metal packaging after filling. The heat treatment the food undergoes is in principle related to the type of food, and may further vary per recipe and producer.

The metal of the can is usually steel or aluminium. In the steel and aluminium industry as well as in the packaging industry and in the food industry it is continuously sought to improve the packaging e.g. regarding the amount of material consumed when producing a can, or the amount of material which can be recycled or the appearance of a can to the consumer.

An example of the achievements of continuous innovation is a can according to the Le Carré® concept, which is a multi-panel type of can having flat shell parts, as disclosed in e.g. EP 1005428 entitled "metal body for packaging purposes, for example a food can".

According to EP 1005428, by providing a flexible can it is possible to work a method for heat treating, for example sterilising a filled can in an autoclave, whereby the can needs to be handled far less critically in terms of pressure. In practice this means that the pressure control of the autoclave is far easier to achieve. As long as the pressure in the autoclave is higher than the pressure in the can nothing can go wrong.

Although the concept of Le Carré® as set out above was very promising there is a problem that it is not always economically attractive to perform heat treatment in autoclaves albeit under flexible conditions. Commercial sterilisation autoclaves operate batch-wise and batch processes are not economically attractive for all food stuffs in the food packagings under consideration.

Further, there is a need to find better solutions for accessibility of canned food stuff by providing more easily opening closures and it is known that such closures because of their easy opening characteristics will be more vulnerable to—even quite low- internal over-pressure situations, especially when such an over-pressure situation is combined with high temperature, like a sterilisation temperature of 120 °C or more, and time, e.g. during a sterilisation period of half an hour or more. In the present document, the term over-pressure denotes a pressure in the closed can that is higher

than the pressure outside the closed can. Similarly the term under-pressure denotes a pressure in the closed can that is lower than the pressure outside the closed can.

This problem is now overcome or reduced substantially by the first embodiment of the invention defined as a method for providing a heat treated filled and closed can,

5 comprising the consecutive steps of:

- filling a metal cup,
- closing the metal cup with a lid making a gas tight heat treatable can,
- heat treating the can,

wherein measures are taken to achieve an under-pressure in the can after closing the  
10 cup characterised in that the can is of a flexible type.

The measures comprise a step belonging to the group of steps consisting of:

- using a partly frozen filling;
- having the filling comprise constituents that interact after closing so as to lower the specific volume of the filling in the can;
- 15 - adding steam to the cup after filling and before closing;
- closing the cup under sub-atmospheric pressure;
- partly evacuating the can after closing;

The term flexible denotes that the volume the closed and filled can occupies increases substantially if there is only a slight over-pressure in the can and decreases  
20 substantially if there is only a slight under-pressure in the can.

By choosing in this method a can with this feature of flexibility, by shifting from a pressure orientated approach to a volume orientated approach advantages are achievable as will elucidated further hereafter.

In this context the filling comprise constituents that interact after closing so as to  
25 lower the specific volume of the filling in the can means for example having the filling comprise constituents that after the cup is closed react so as to form a reaction product that occupies a lower volume than that of the original constituents, and this independently of the effect temperature has on volume.

In an embodiment of the method according to the invention wherein a can is  
30 chosen that is of a flexible type, the can is closed with a lid of the easy pull off seal on type adhered by a sealant to the metal cup. According to the invention it is now possible to use such a very easily openable but over-pressure sensitive lid in spite of the heat treatment that would by industry prejudice necessarily cause over-pressure which would lead to failure of such over-pressure sensitive seal on type lid.

35 In preferred embodiments a can is chosen that is of a flexible type that has a flexibility of more than or equal to 25, preferably 35, the flexibility being quantitatively

defined in detail hereafter. By choosing a can that has a flexibility of a considerably higher value than conventional heat treatable cans, the risk of too high an over-pressure as well as of too high an under-pressure is considerably reduced.

5 In a preferred embodiment a can is chosen that is of a flexible type capable of surviving a volume reduction of more than 7.5%, preferably more than 10% or even 15% without collapsing. By choosing such a can the risk of collapse in an extreme under-pressure situation is minimised.

10 The invention is also embodied in a method according to claim 1, wherein a cup is chosen that comprises an essentially flat wall panel. Such a cup is flexible because of the mechanical properties inherent in an essentially flat panel forming part of a body, in this case the cup.

The aforementioned problem is also overcome or reduced substantially by the second embodiment of the invention defined as a method for providing a heat treated filled and closed can, comprising the consecutive steps of:

- 15
- filling a metal cup,
  - closing the metal cup with a lid making a gas tight heat treatable can,
  - heat treating the can,

20 wherein measures are taken to achieve an under-pressure in the can after closing the cup characterised in that the can is of a rigid type and that the can comprises a lid of the easy pull off type adhered to the metal cup, the measures being of the kind mentioned above.

The term rigid denotes that the volume the closed and filled can occupies does not change substantially if there is even a substantial over-pressure in the can and vice versa.

25 By choosing in this method a can with this feature of rigidity, by shifting in a pressure orientated approach the internal under-pressure to a higher absolute values, thus lowering the maximum internal over-pressure, it is now possible to use a "seal on" can lid, provided that the rigid can is made strong enough to bear the increased internal under-pressure as will elucidated further hereafter.

30

### Detailed description of invention

35 Figure 1 is a graph of  $\Delta P - \Delta V$  with homogeneous temperature  $T$ , and shows the performance of a Le Carré® fitted with a lid of the easy pull off type (EPOL) and a reference can during sterilisation with varying degrees of vacuum filling achieved by adding steam to the cup of the can before closing. The line denoted '1' represents Le

Carré®, the line denoted '2' represents the reference can, the line denoted '3' represents the upper boundaries and the line denoted '4' represents the lower boundaries explained hereinafter.

5 The vertical axis denotes the volume change  $\Delta V$  in ml of the can and the horizontal axis denotes the pressure difference  $\Delta P$  over the can in bar. The  $\Delta P$ - $\Delta V$  measurements are performed by pumping a fluidum, in this case water, into an already filled can (over-pressure situation) or pumping water out of a filled can (under-pressure situation). The pressure and volume changes are measured as the water is pumped in or out.

10 In figure 1 the flexibility line denoted "Le Carré®" (wall 0.13 mm, bottom 0.17 mm, EPOL 0.17 mm) extends from the lower left quadrant into the upper right quadrant and the gradient of the line represents the flexibility of the Le Carré® can, of which can a photographic representation is shown in figure 2. The flexibility line denoted "reference can" also extends from the lower left quadrant into the upper right quadrant and the gradient of the line represents the flexibility of a round reference can (diameter 73mm, 0.14mm 3 piece steel can with conventional 0.196mm ends, maximum contents 414 ml at ambient conditions). Defining flexibility as the gradient

$$\frac{\Delta V}{\Delta P}$$

20

of the flexibility line in the interval between  $\Delta V = -10\text{ml}$  and  $\Delta V = 10\text{ml}$  the Le Carré® can has a flexibility of approximately 154 which is about nine times greater than the reference can which has a flexibility of approximately 17.

25 For completeness it is remarked that to be able to compare the flexibility of different containers, in case a container with a different content would have to be tested, for example a container with a maximum content of 500 ml at ambient conditions, the interval to be used to calculate the flexibility will be  $500/414 \cdot 10$  which is approx. 12 ml.

30 The upper and lower boundaries represent the extreme process conditions the can may be subjected to during the sterilisation process. The upper boundaries are based on a sterilisation process with a sterilisation temperature of 121°C and a counter pressure of 2 bar, the lower boundaries are based on conditions where the temperature is 20°C and the counter pressure is also 2 bar.

35 The specific boundary conditions illustrated in figure 1 apply to placing a filling at a temperature of 60°C in an cylindrical test vessel with a content of also 414 ml,

leaving 5% headspace above the filling and applying pressure to the contents of the test vessel (i.e. to both the filling and contents of the headspace) via a piston. The external pressure applied to the test vessel was 2 bar. The pressure and volume changes across the test vessel were measured with the system at a lower temperature of 20°C and an upper temperature of 121°C.

The "normal" boundary represents the situation where there is no steam supplied to the can cup before closing. However, as the temperature of the filling is 60°C, approximately 20% of the air in the headspace will be replaced. The remaining upper and lower boundary conditions are marked with percentages that indicate the percentage of air deliberately replaced by adding steam into the headspace. Such partial or whole vacuum filling results in the can having to withstand less over-pressure during sterilisation.

According to the invention, the over-pressure may be reduced by adding steam to the cup after filling and before closing but the same effect can according to the invention also be obtained by using a partly frozen filling, having the filling comprise constituents that interact after closing so as to lower the specific volume of the filling in the can, closing the cup under sub-atmospheric pressure and partly evacuating the can after closing.

From figure 1 it can clearly be seen that replacing e.g. 50% of the air in the headspace with steam reduces the over-pressure in the hot state as well as increases the under-pressure in the cold state.

Reducing, or even completely avoiding, over-pressure in the can during the sterilisation process enables the can to be sealed with a seal on lid, e.g. an easy pull off lid (EPOL), e.g. an EPOL made of ultra-thin polymer coated packaging steel, without risking failure of the lid. A lid such as an EPOL can be particularly sensitive to over-pressure and thus may give a risk of failing during a conventional sterilisation procedure. One method of improving the survival rate of cans fitted with EPOLs is applying a carefully controlled sufficient external counter pressure during the sterilisation process to reduce or compensate the over-pressure experienced by the can.

The present invention achieves the same result without requiring the application of such counter pressure. In conventional continuous sterilisation processes, e.g. the hydrostatic process, the way of supplying additional counter pressure is by adding more stages to the installation, which is complicated and expensive. The method of the first embodiment of the present invention thus makes it possible to sterilise large amounts of flexible type cans having a flexibility of e.g. more than 25 in a continuous

hydrostatic sterilisation process without requiring expensive additional stages to be included in the installation. The method of the second embodiment of the present invention thus makes it possible to sterilise large amounts of rigid cans having increased strength and a flexibility of e.g. less than 20 and fitted with an easy pull off lid in a continuous hydrostatic sterilisation process without requiring expensive additional stages to be included in the installation.

As can be seen from the lower process boundaries, the lowering of the over-pressure in the can however, also increases the under-pressure in the can. The "normal" boundary line shows less severe under-pressure conditions than those obtained when 50-100% of the air in the headspace is replaced. To overcome this the method of the first embodiment of the present invention uses a flexible can, able to withstand the increased under-pressure.

The method of the second embodiment uses a can of a rigid type with increased strength fitted with an EPOL lid.

It is remarked that a steam filled rigid round can (diameter approx. 85 mm, height approx. 85 mm, made from aluminium thickness 0.24 mm) fitted with a conventional seamed full aperture easy open lid is known. Such a can is in the market for packaging of e.g. sweet corn. The heat treated filled and closed can according to the method of the second embodiment of the present invention however is a rigid can fitted with an easy pull off seal on lid rather than a conventional full aperture easy open lid. Thus, contrary to current industry expectation, by using the method of the present invention it is now possible to apply EPOLs in such cans and to process such cans in straightforward and large scale heat treatment processes without increased risk of failure.

From figure 1 it can be seen that the Le Carré® can flexibility line crosses through and extends beyond the lower boundaries of the process conditions. The Le Carré® can provided according to the method of the invention will thus not fail even under the most extreme conceivable conditions. The reference can flexibility line however, does not extend to or cross all the lower boundary lines. The reference can is not strong and rigid enough or flexible enough to withstand extreme under-pressure and fails.

The method of embodiment one of the present invention using a flexible can thus enables such cans to be sterilised without counter pressure even when fitted with over-pressure sensitive lids such as EPOLs.

Experiments have shown that the flexible Le Carré® can is best able to withstand under-pressure if the headspace is relatively small, e.g. less than 8%.

It is remarked that the rigid can is best able to withstand under-pressure if the headspace is relatively large, e.g. more than 5%.

Although the method has been described in detail with reference to Le Carré® it is clear that the method could be used successfully for other heat treated, filled and  
5 closed flexible cans or idem rigid cans of increased strength fitted with lids vulnerable to over-pressure.



**CLAIMS**

1. Method for providing a heat treated filled and closed can, comprising the consecutive steps of:
- 5           - filling a metal cup,  
          - closing the metal cup with a lid making a gas tight heat treatable can,  
          - heat treating the can,
- wherein measures are taken to achieve an under-pressure in the can after closing the cup **characterised in that** the can is of a flexible type.
- 10           2. Method according to claim 1 wherein the can is closed with a lid of the easy pull off seal on type adhered by a sealant to the metal cup.
3. Method according to claim 1 or 2 wherein a can is chosen that has a flexibility of
- 15           more than or equal to 25.
4. Method according to any of the claims 1-3 wherein a can is chosen that has a flexibility of more than or equal to 35.
- 20           5. Method according to any of the claims 1-4 wherein a can is chosen that is of a flexible type capable of surviving a volume reduction of more than 7.5%, preferably more than 10% or even 15% without collapsing.
6. Method according to any of the claims 1-5 wherein a cup is chosen that
- 25           comprises an essentially flat wall panel.
7. Method for providing a heat treated filled and closed can, comprising the consecutive steps of:
- filling a metal cup,
- 30           - closing the metal cup with a lid making a gas tight heat treatable can,  
          - heat treating the can,
- wherein measures are taken to achieve an under-pressure in the can after closing the cup **characterised in that** the can is of a rigid type and that the can comprises a lid of the easy pull off type adhered to the metal cup.

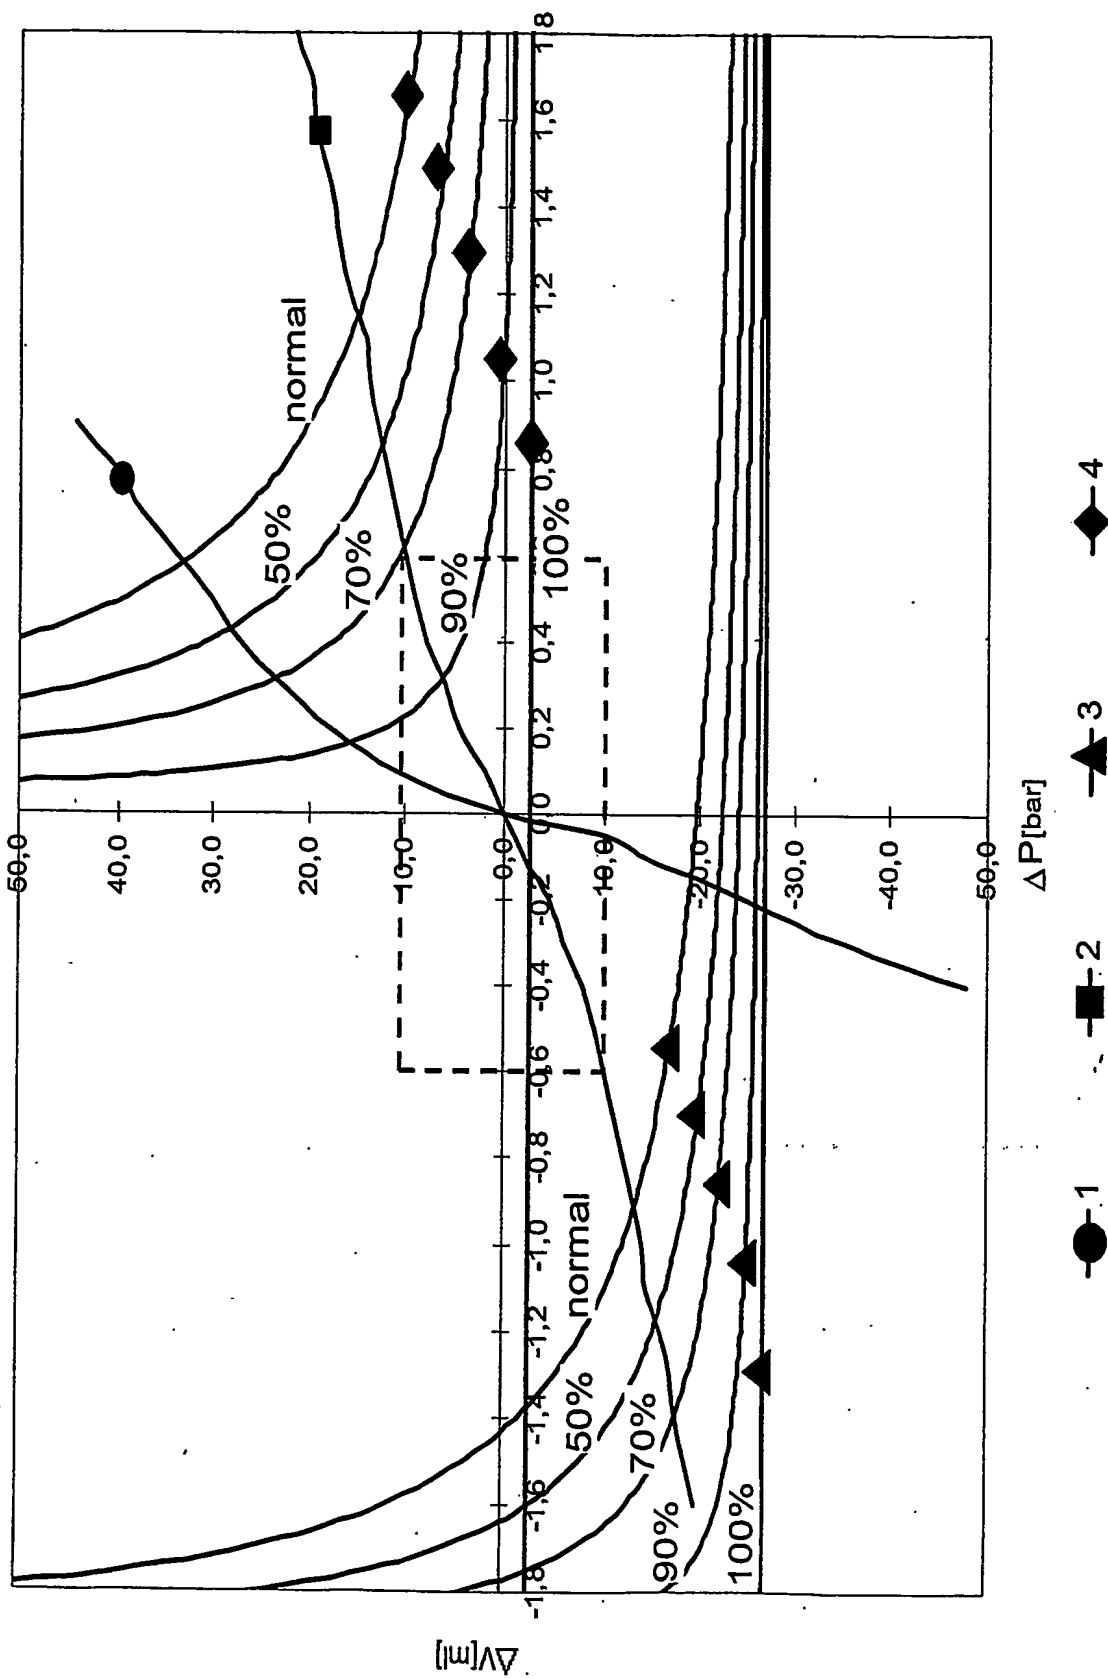


Fig. 1

2/2

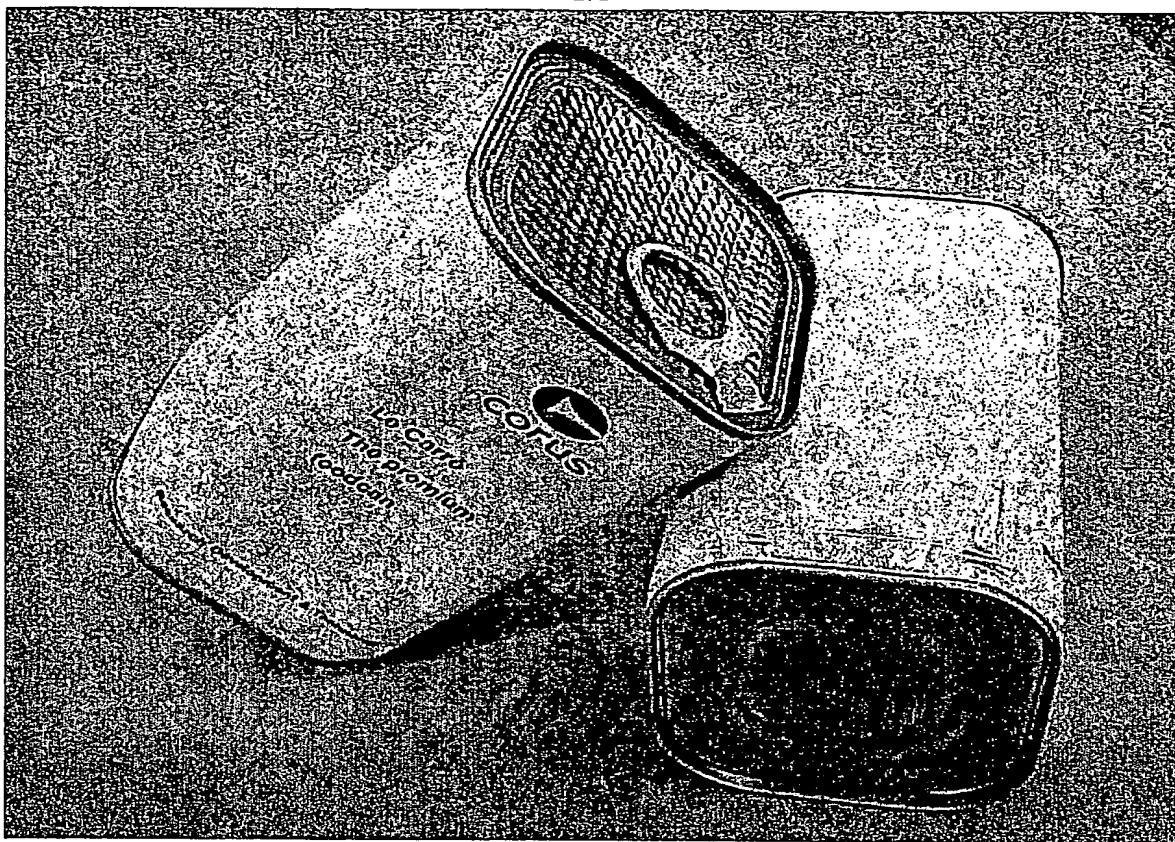


Fig. 2

BEST AVAILABLE COPY

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/06903

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B65B55/02 B65B25/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 44 04 083 A (EFFEM GMBH) 10 August 1995 (1995-08-10) column 1, line 25 - line 33; claims 1,16 column 1, line 65 column 2, line 62 - line 65 column 3, line 56 - line 61 column 4, line 51 - line 54 ---	1-7
X	US 4 967 538 A (LEFTAULT JR CHARLES J ET AL) 6 November 1990 (1990-11-06) column 1, line 30 - line 40; figures 1-6,8,9 column 4, line 4 - line 11 column 8, line 60 -column 9, line 14 --- -/--	1-7

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

18 November 2003

Date of mailing of the international search report

03/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5816 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Johne, 0

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/06903

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 213 337 B1 (KAMPERMAN STEPHANUS MARIA ET AL) 10 April 2001 (2001-04-10) cited in the application the whole document	1,3-6
A	US 5 125 528 A (ROTH DONALD J ET AL) 30 June 1992 (1992-06-30) column 1, line 5 - line 8; figures 1-16 column 3, line 54 - line 65 column 4, line 34 - line 40	2
A	US 5 804 237 A (SLOCUM RAY G ET AL) 8 September 1998 (1998-09-08) column 1, line 12 -column 7, line 8; figures 1-3	1-7
A	GB 2 266 218 A (REYNOLDS PHILIP) 27 October 1993 (1993-10-27) page 5, line 7 -page 8, line 6; figures 1,2 page 12, line 4 - line 15	1-7
A	US 4 919 955 A (MITCHELL JERRY L) 24 April 1990 (1990-04-24) column 5, line 14 -column 7, line 2; figures 1-6	1,2,7

BEST AVAILABLE COPY

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/06903

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4404083	A	10-08-1995	DE 4404083 A1	10-08-1995
			AT 197381 T	11-11-2000
			AU 686300 B2	05-02-1998
			AU 1413195 A	29-08-1995
			CA 2182510 A1	17-08-1995
			WO 9521541 A1	17-08-1995
			DE 19580045 D2	17-04-1997
			DE 59508842 D1	14-12-2000
			EP 0739170 A1	30-10-1996
			ES 2152381 T3	01-02-2001
			JP 9509315 T	22-09-1997
			US 5958487 A	28-09-1999
US 4967538	A	06-11-1990	US 4836398 A	06-06-1989
US 6213337	B1	10-04-2001	NL 1006809 C2	23-02-1999
			AT 208731 T	15-11-2001
			AU 726475 B2	09-11-2000
			AU 9261898 A	08-03-1999
			BR 9811968 A	15-08-2000
			DE 69802549 D1	20-12-2001
			DE 69802549 T2	01-08-2002
			DK 1005428 T3	11-03-2002
			EP 1005428 A1	07-06-2000
			JP 3435693 B2	11-08-2003
			JP 2001514999 T	18-09-2001
			CN 1090135 B	04-09-2002
			WO 9908940 A1	25-02-1999
			ES 2167936 T3	16-05-2002
			PL 338646 A1	06-11-2000
			PT 1005428 T	31-05-2002
US 5125528	A	30-06-1992	AT 118431 T	15-03-1995
			AU 649188 B2	12-05-1994
			AU 7078291 A	18-07-1991
			CA 2071939 A1	19-06-1991
			DE 69017046 D1	23-03-1995
			DE 69017046 T2	20-07-1995
			EP 0506871 A1	07-10-1992
			JP 5502651 T	13-05-1993
			WO 9108959 A1	27-06-1991
			US 5830398 A	03-11-1998
US 5804237	A	08-09-1998	AP 1003 A	17-08-2001
			AU 718405 B2	13-04-2000
			AU 7443796 A	07-05-1997
			BR 9611115 A	13-07-1999
			CN 1203558 A ,B	30-12-1998
			DE 69629397 D1	11-09-2003
			EA 194 B1	24-12-1998
			EP 0906222 A1	07-04-1999
			HK 1016138 A1	02-08-2002
			JP 2001518039 T	09-10-2001
			PL 326168 A1	31-08-1998
			RO 117250 B	28-12-2001
			TR 9800681 T2	22-10-2001
			WO 9714614 A1	24-04-1997

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/06903

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
GB 2266218	A	27-10-1993	IE	921266 A1	03-11-1993
			BE	1004184 A6	06-10-1992
US 4919955	A	24-04-1990	AU	636310 B2	29-04-1993
			AU	4502289 A	28-04-1991
			EP	0494856 A1	22-07-1992
			WO	9104922 A1	18-04-1991
			US	5481852 A	09-01-1996
			US	6210730 B1	03-04-2001
			US	5597599 A	28-01-1997
			US	5352467 A	04-10-1994